



BG1000 series barrier gates adopt ZKTeco interactive LED chassis design, programmable control panel, and adopt high-efficiency Brushless DC motor and SCM421 material gear transmission structure. It has the advantages of fast speed, stable quality, rich function expansion, and so on. It is a better comprehensive performance barrier gate.

## Features

- The fastest operating speed is 1.5s, and the speed can be adjusted according to different boom arm length
- Reversible boom arm direction, compact and straightforward transmission mechanism, easy to install on-site
- Interactive chassis with LED indicator
- Digital control monitoring, delay automatic close, automatic test, rise/fall status display output
- Automatically turning off settings; allowing manual raising of the gate arm; anti-smashing; equipped with fire protection linkage functions; highly secure
- Users could adjust the position and the angle of rising/falling; there is a digital encoder automatically and accurately controlling the position
- Supports to use 24V backup battery, ensuring normal operation when power is unexpectedly disconnected
- The chassis exterior uses a 2mm metal plate, electrophoresis, and powder coding
- The gate arm will move to the original position when it detected something blocked it


## Specifications

Model	BG1030L/R	BG1045L/R	BG1045L/R-LED	BG1145L/R-90
Operating Speed	1.5s	2.5s	2.5s	2.5s
Boom Arm Length	3m	4.5m	4.5m	4.5m
Boom Arm Type	Telescopic straight boom arm		Straight boom with LED	Folding boom
Chassis Dimension	350*300*1020mm			
Motor Type	24V brushless DC motor			
Output Power	120W			
Rated Current	6A			
Power Supply	AC 220V,50Hz / AC 110V,60Hz			
Operating Temperature	-35°C to 70°C			
Operating Humidity	<90%			
Motor MCBF	3 million times			
Remote Control Distance	≥30m			
Chassis Weight	45kg			


## Directions




L: The chassis on the left, the boom arm on the right

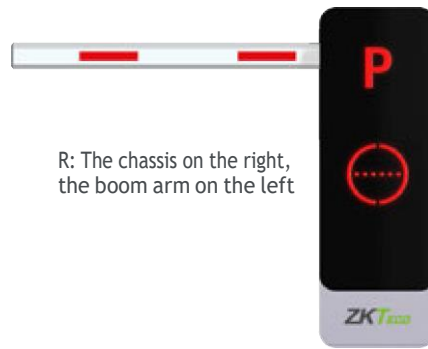

R: The chassis on the right, the boom arm on the left

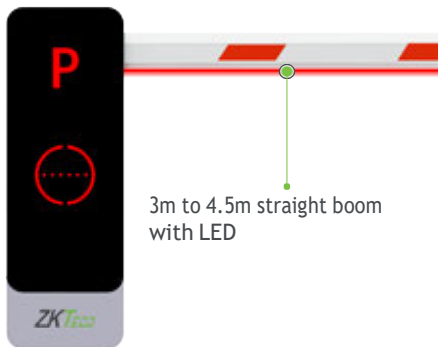


3m to 4.5m straight boom with LED

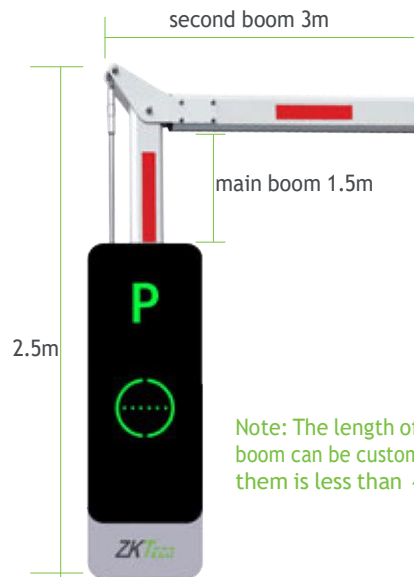


Note: The length of main boom and second boom can be customized, and total length of them is less than 4.5m

## Dimensions (mm)

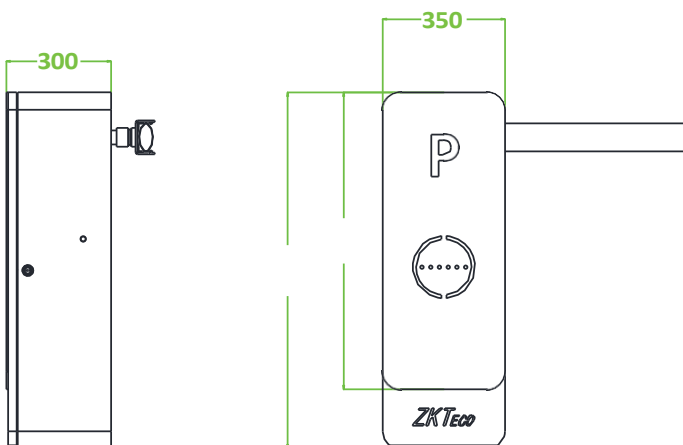

## Related Products

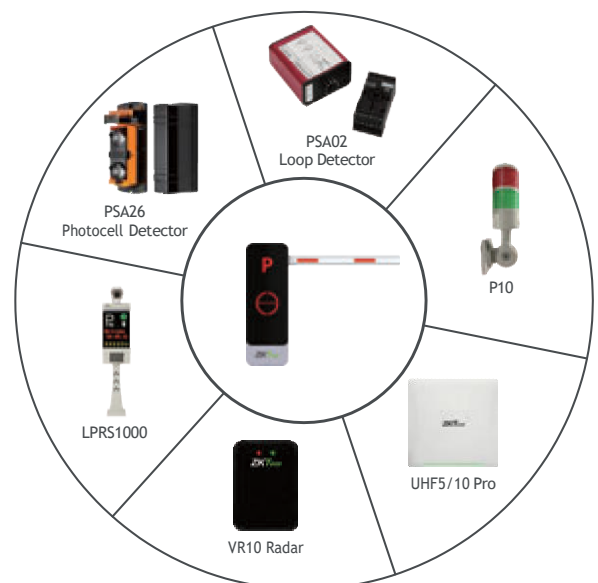

V1.0 2021.05.18

Nos As  
Skredderveien 142  
1537 Moss

Tlf: 466 50 500  
Mail: [ordre@nos-as.no](mailto:ordre@nos-as.no)  
[www.nos-as.no](http://www.nos-as.no)

**NOS**  
NORDISK OMRÅDESIKRING